

# **Cleaning wells after seawater flooding**

TECHNICAL NOTES ON DRINKING-WATER,  
SANITATION & HYGIENE IN EMERGENCIES

**Originally designed for print, this is one of the series of highly illustrated notes prepared by WEDC for WHO to assist those working immediately or shortly after an emergency to plan appropriate responses to the urgent and medium-term water, sanitation and hygiene needs of affected populations.**



**TN 15**



**World Health  
Organization**



**Loughborough  
University**

# Contents

Introduction .....	3
Rehabilitation and cleaning of wells .....	3
Step 1: Removing debris and excess salinity .....	5
Step 2: Natural cleaning .....	11
Step 3: Disinfection .....	11
Precautions .....	13
Further reading .....	19
About this note .....	19



## Introduction

Many people living in coastal regions rely on shallow groundwater for their water supply. Seawater flooding after a severe storm or tsunami can damage wells and contaminate the groundwater. This technical note provides advice for rehabilitating wells in such circumstances. It should be used in conjunction with [Mobile Note 31](#) which provides general information about rehabilitating wells after a disaster.


## Rehabilitation and cleaning of wells

The aims of cleaning shallow open domestic wells after a natural saltwater flooding event are to:

- facilitate provision of safe unpolluted water for drinking and other domestic purposes;
- minimize the potential for irreversible damage to the coastal aquifer;

- minimize the potential for saltwater intrusion (drawing saltwater into the well); and
- minimize the collapse or destruction of the well.

Figure 1 outlines a simple three-step procedure for cleaning and rehabilitating saltwater-contaminated shallow wells.

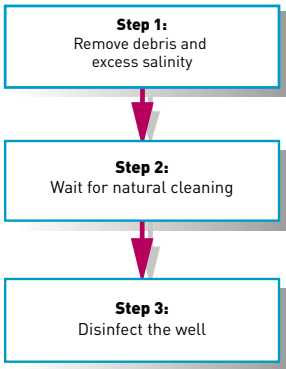

**Figure 1.** Steps for cleaning a saltwater-contaminated well

---

## **Step 1: Removing debris and excess salinity**

As soon as possible after the flooding event the following actions should be taken:

1. Remove debris, waste and polluted water pools close to the well (Figure 2).
2. If the well has been damaged, and shows cracks in the walls or apron or if it has been undermined by erosion, the well should be abandoned, replaced, or rehabilitated (Figure 3).
3. Remove floating debris inside the well manually, using a sieve or bucket (Figure 4).
4. Use a sludge pump to remove sludge and loose sediment that has accumulated at the bottom of the well.
5. Calculate the volume of water in the well (Box 1). Slowly remove the water

using a pump or bucket (Box 2) taking care not to pump so quickly that the well empties.

Pumped water should be discharged to the sea, or alternatively into a nearby river or stream.

Construct a drainage canal downstream of other freshwater wells to avoid recirculation of the contaminated water. At this point, the well water may become unclear for up to a day, after which the well water can be used for household purposes, *but not for drinking*.

**The well should not be pumped out repeatedly in an attempt to lower the salinity.**

**If the well smells of oil or petrol or has a greasy film or shine on the surface, the well should not be used.**

---

## Box 1. Calculating the volume of water in the well

Calculate the volume of water in the well using the formula:

$$V = \frac{\pi D^2 h}{4}$$


Where


$V$  = volume of water in the well ( $\text{m}^3$ )

$D$  = diameter of the well (m)

$h$  = depth of water (m)

$\pi$  = 3.142




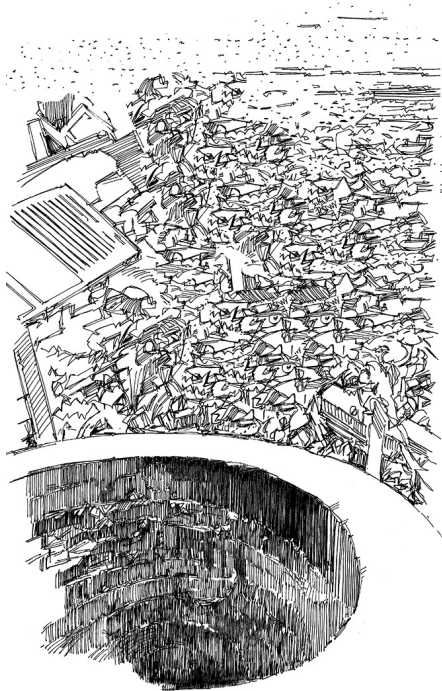

**Figure 2.** Remove debris and waste close to the well


---



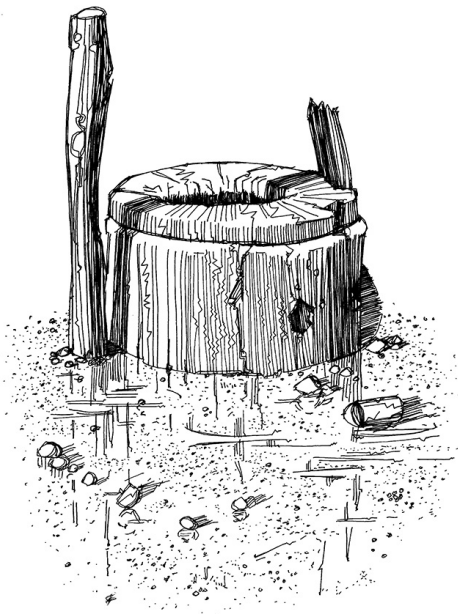

**Figure 3.** A damaged well, showing cracks in the walls

---

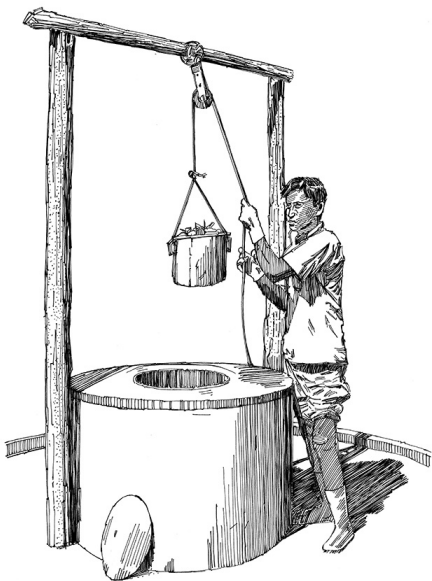

**Figure 4.** Removing debris using the bucket

---

## **Step 2: Natural cleaning**

Leave the well without further intensive pumping until the salinity drops to a level acceptable for drinking.

This level should be based on the judgement and preference of the community and not on strict water quality standards.

The period required for natural restoration of freshwater conditions may be long, depending on rainfall conditions and subsurface characteristics. It could be as long as one to two years.

In the interim period, the well may be used for domestic purposes, such as washing and cleaning, but other sources of water for drinking should be sought.

## **Step 3: Disinfection**

When the salinity of the well water has reached tolerable levels for drinking, the well should be disinfected.

WHO endorses the disinfection of drinking water in emergency situations. There are various ways of doing this but the most common is chlorination as it leaves a residual disinfectant in the water.

Chlorine has the advantage of being widely available, simple to measure and use, and it dissolves easily in water. Its disadvantages are that it is a hazardous substance (to be handled with care) and that at commonly applied concentrations it is not effective against all pathogens (e.g. cysts and viruses).

The chlorine compound most commonly used is high-strength calcium hypochlorite (HSCH) in powder or granular form as it contains 60 to 80% chlorine. Also used is sodium hypochlorite in liquid bleach or bleaching powder form. Each chlorine compound has a different amount of usable chlorine depending on the

quantity of time the product has been stored or exposed to the atmosphere and the way it is made. Technical Note 1, Box 2 outlines methods for calculating appropriate chlorine doses for HSCH granule chlorine. Stir the water in the well thoroughly with a long pole and then allow the water to stand for at least 30 minutes.

Further details on chlorination are given in [Mobile Note 41](#).


## **Precautions**

Repeated chlorination of wells should be avoided as chlorine residual may contaminate the aquifer and present health problems, such as skin rashes when the water is used for bathing.

Permanent disinfection of the well water cannot be guaranteed by chlorination because a background source of contamination may exist in the surrounding groundwater.

## Use of alternative water sources

It is important to consider carefully the switch from using a well to other drinking-water sources during a flooding event. It may be a better solution to have people use slightly saline but disinfected well water rather than freshwater from unprotected sources. It is important to convey the message to consumers that salinity is not a threat to health if the taste is tolerable. In the short-term, freshwater can be imported by tanker (Figure 5) whilst care is taken to properly and consistently disinfect an alternative water supply.

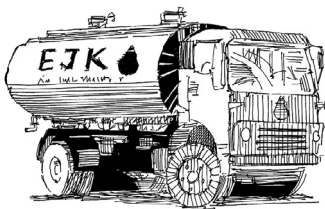

**Figure 5.** Water tankering (see [Note 42](#))

---

## Protection of groundwater

After seawater flooding, it is important to avoid further saltwater intrusion into freshwater sources.

Some simple precautions include the following:

- Wells that were clear but are becoming salty should be pumped less or abandoned temporarily. Freshwater should be sought from neighbouring wells that are clear.
- Intensive pumping should be avoided as it may cause the well to become saline. Similarly, new high-production wells should be dug away from the coast and other sources of pollution.
- Deep wells (greater than 5m deep) and wells pumped with motorized pumps should be regularly monitored for salinity as they stand a greater risk of pollution from saline water.


- Existing wells should not be deepened and new deep wells (over 10m) should not be dug in coastal areas with the intention to draw freshwater from an underlying aquifer.
- Stagnant water bodies close to the wells should be kept clean of debris. If pollution is suspected from e.g. the observation of an oil film on the surface of the water, then the water should be drained to the sea.
- In other cases, stagnant water should not be drained in an attempt to remove the salt. Rather, channel rainwater to depressions in order to increase the flushing and cleaning of the groundwater.
- In some parts of the world, certain anopheline mosquito vectors of malaria prefer to breed in brackish water. The assumption that standing brackish water poses no malaria risks is therefore incorrect.



---

## Box 2. Over-pumping of well

When a coastal area is flooded, wells and surroundings are penetrated by saltwater. Pumping out a well alone does not solve the problem, as saltwater is also present in the soil and aquifers below. The best and quickest remedy for restoring the well to its previous condition is natural flushing from rainfall and from freshwater infiltration into the ground from natural or constructed freshwater ponds, dams or other retained sources of rainwater.

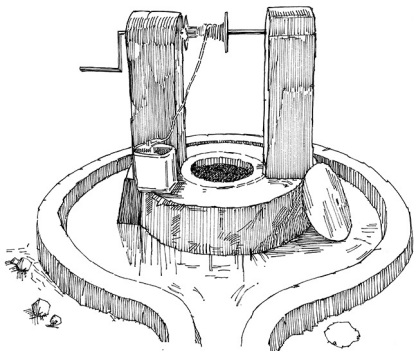

Excessive pumping (more than the total volume of water in the well) exacerbates the salinity problem by slowing down natural rehabilitation. It also wastes time, human resources and energy.

---

### **Box 3. Health aspects of salinity in drinking water**

Salt in drinking-water is not a risk to human health at the level that people normally find it acceptable to drink. As such, there are no health-based guidelines or standards to adhere to. What is acceptable to the community depends very much on individual tastes and habits.



A well, therefore, may be used for non-drinking purposes such as washing and later for drinking-water when people find the taste acceptable.

---

## Further reading

GOSWAMI, R.R. and CLEMENT, T.P., 2007. *Technical details of the SEAWAT model simulation results used to develop well cleaning guidelines*, Technical Summary Report. Department of Civil Engineering, Auburn University.

VILLHOLTH, K.G., 2007. Tsunami impacts on groundwater and water supply in eastern Sri Lanka', *Waterlines*. 26(1). Rugby, UK: Practical Action Publishing.

## About this note

Prepared for WHO by WEDC.

Author: Karen Vilholth, IWMI

(International Water Management Institute)



Series Editor: Bob Reed

Illustrations by Rod Shaw courtesy of  
WEDC / IFRC. Additional graphics by Ken  
Chatterton.

Designed and produced by WEDC

**Water, Engineering  
and Development Centre (WEDC)  
School of Civil and Building Engineering  
Loughborough University  
Leicestershire LE11 3TU UK**

**Phone:** + 44 (0) 1509 222885

**Email:** [wedc@lboro.ac.uk](mailto:wedc@lboro.ac.uk)

**Website:** [wedc.lboro.ac.uk](http://wedc.lboro.ac.uk)

**Twitter:** [wedcuk](https://twitter.com/wedcuk)

**YouTube:** [wedclboro](https://www.youtube.com/wedclboro)

**World Health Organization  
Water, Sanitation, Hygiene and Health  
Unit, Avenue Appia 20, 1211, Geneva 27,  
Switzerland**

**Phone:** + 41 22 791 2111

**Phone (direct):** + 41 22 791 3555/3590

[www.who.int/water\\_sanitation\\_health](http://www.who.int/water_sanitation_health)

© World Health Organization 2013. All rights reserved.  
All reasonable precautions have been taken by the World Health Organization to verify the information contained in this publication. However, the published material is being distributed without warranty of any kind, either expressed or implied. The responsibility for the interpretation and use of the material lies with the reader. In no event shall the World Health Organization be liable for damages arising from its use.



**[BACK TO TOP](#)**

---

**Note:** Click on the home icon wherever it appears to return to the list of subjects.

---